

## FXDO20.25.32PB

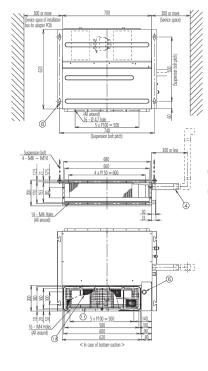



Nr	Part name	Description
1	Liquid pipe connection	ø 6.4 (Flare connection)
2	Gas pipe connection	ø 12.7 (Flare connection)
3	Drain pipe connection	VP20 (O.D. ø 26 / I.D. ø 20)
4	Drain hose (Accessory)	I.D. ø 25 (Outlet)
5	Control box	
6	Transmission wiring connection	
7	Power supply connection	
8	Suspension bracket	
9	Inspection door	
10	Socket for drain	
11	Protection for drain	
12	Air filter (Accessory)	

## NOTES

- In case of back-suction, mount chamber cover to bottom side of the unit.
  - In case of bottom-suction, mount chamber cover to back side of the unit.
- 2 Location of unit's name plate: control box cover.
- Mount the air filter at the suction side.
  (Select its colorimethod (gravity method) 50% or more).
  It can not be equipped with air filter (accessory) when connecting duct to suction side.